

ENGINEERING DATA

THERMALLY CONDUCTIVE, PATENTED ALUMINUM CORE

The counter-flow heat recovery core transfers heat between the two airstreams. It is easily removed for cleaning or service.

MOTORS AND BLOWERS

Each airstream has one centrifugal blower driven by a common PSC motor, with multiple fanspeed operations.

FILTERS

Washable air filters in exhaust and supply airstreams.

MOUNTING THE HRV

Threaded inserts at corners of the cabinet designed to accept the "S" hooks and hanging straps supplied with the unit.

DEFROST

Recirculating damper defrost system.

CASE

20 gauge prepainted galvanized steel for superior corrosion resistance, insulated to prevent exterior condensation. Drain connections: Two 1/2 in (12 mm) OD. Balancing ports are located on unit.

ELECTRONICS

Control included with the unit can be wall mounted in a central location of the home. 3 wire 20 gauge (min.) 100 ft length (max.).

CONTROL

99-DXPL02 Lifebreath Digital Control

- 5 speed operation on each mode
- 5 user selectable operational modes: Continuous Ventilation, Continuous Recirculation, 20 ON/40 OFF, 10 ON/50 OFF, 20 ON/40 Recirculation
- Compatible with 99-DET02 Wireless Timers
- Humidity control through adjustable Dehumidistat
- 20/40/60 High speed override button
- 3 wire connection

TIMER OPTIONS

99-DET01 Lifebreath 20/40/60 Minute Timer - Initiates High speed Ventilation for 20, 40 or 60 minutes. 3 wire connection.

99-DET02 WIRELESS Lifebreath 20/40/60 Minute Timer - Initiates High speed Ventilation for 20, 40 or 60 minutes. Wirelessly connects to main control for ease of installation. 40' approximate range.

99-RX02 WIRELESS Repeater - Used to extend range of 99-DET02 Wireless Timers. Plugs into 120V power outlet. Wirelessly connects to main control and 99-DET02. Install at halfway point between timer and main wall control if timer is out of range.


ACCESSORY OPTIONS

99-163 Duct Heater w/ Electronic SCR Thermostat - 1 kW, 6 in (152 mm).

99-186 Weatherhoods - Two 6 in (152 mm).

WEIGHT 71 lbs (32 kg) **SHIPPING WEIGHT** 73 lbs (33 kg)

DIMENSIONS 155MAX

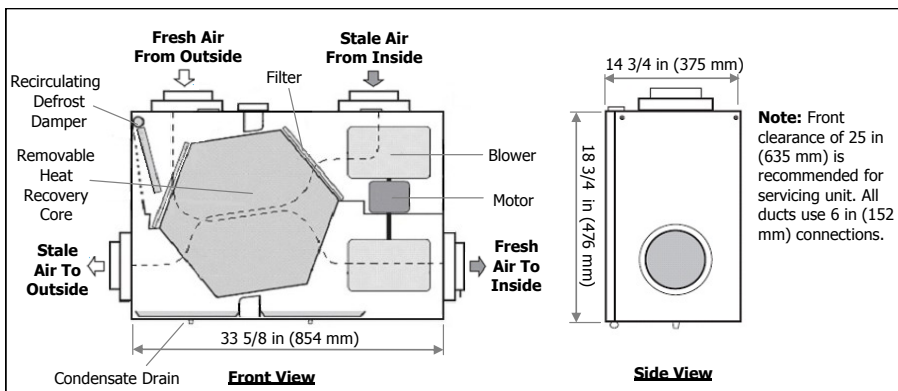


Performance (HVI certified)		
Net supply air flow in cfm (L/s) against external static pressure		
External Static Pressure	Airflow	
@ 0.1 in(25 Pa)	184 cfm	(87 L/s)
@ 0.2 in(50 Pa)	163 cfm	(77 L/s)
@ 0.3 in(75 Pa)	146 cfm	(69 L/s)
@ 0.4 in(100 Pa)	132 cfm	(62 L/s)
@ 0.5 in(125 Pa)	115 cfm	(54 L/s)
@ 0.6 in(150 Pa)	92 cfm	(43 L/s)
@ 0.7 in(175 Pa)	60 cfm	(28 L/s)
Max. Temperature Recovery		86%
Sensible Effectiveness (ASE)		
@ 59 cfm (28 L/s)	32°F (0°C)	84%
Sensible Efficiency (SRE)		
@ 64 cfm (30 L/s)	32°F (0°C)	75%
Sensible Efficiency (SRE)		
@ 64 cfm (30 L/s)	-13°F (-25°C)	71%
VAC @ 60Hz	115	
Watt / Low speed	66	
Watt / High speed	118	
Amp rating	1.4	

Sensible Efficiency: Thermal

Effectiveness: Based on temperature differential between the 2 airstreams

Efficiency: Takes into account all power inputs

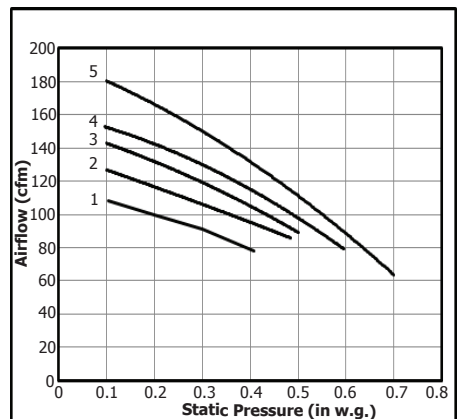

WARRANTY

Units carry a lifetime warranty on the HRV core and a 5 year replacement parts warranty.

NOTE: All specifications are subject to change without notice.

All units conform to CSA and UL standards



Date: _____

Contractor: _____

Tag: _____ Qty: _____

Supplier: _____

Project: _____

Quote #: _____

Engineer: _____

Submitted By: _____